


EL2D Circular IP65 luminaires



The Premier *EL2D* range of luminaires offers a cost effective method of providing mains lighting or emergency lighting in areas requiring attractive but robust IP65 rated luminaires. The polycarbonate base and diffuser house a removable gear tray, control gear and **28Watt 2D** lamp. The luminaires are provided with side and back conduit entries and are easy to install.

- ▀ Mains only & Maintained versions
- ▀ 2250 lamp lumens (mains)
- ▀ IP65
- ▀ Vandal resistant
- ▀ 230Volt (220 – 240V) input
- ▀ Designed to comply with EN60598

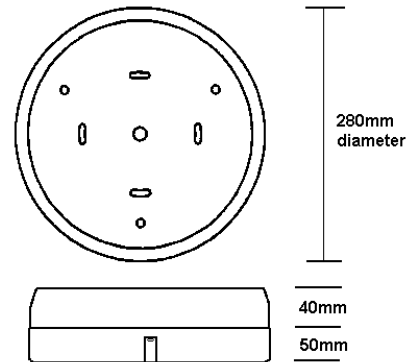

EL28 maintained emergency		
Mounting height Hm (m)	Spacing (m) min. 0.5Lux open area	Spacing (m) min. 1Lux escape
2	11.9	8.2
2.5	12.9	8.6
3	13.7	8.9
4	14.2	9

ORDER CODES:

EF8/NM3 Single 8Watt, Non-maintained, 3 hour duration

EF8/M3 Single 8Watt, Maintained, 3 hour duration